


(Unit/单位: mm)


P2.5 INDOR MODULE



The exclusive butterfly buckle design of the cable, anti-collision. Anti-falling, reinforce the link cable to ensure stable signal transmission.

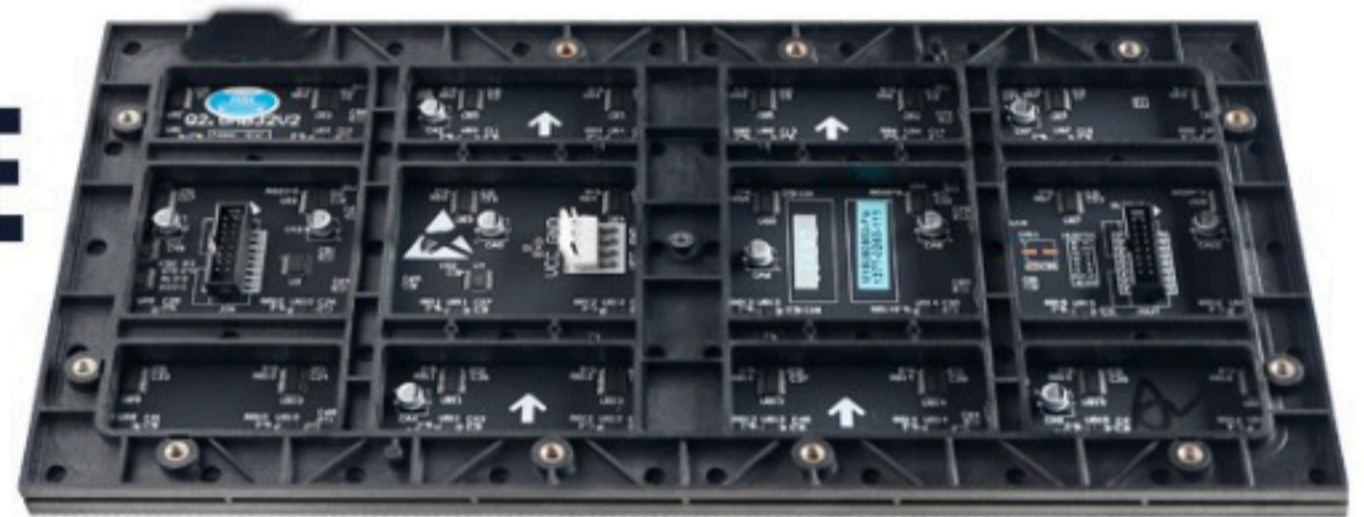



Stable and reliable quality, dead light rate. Stable and reliable quality, dead light rate < 30PPM.

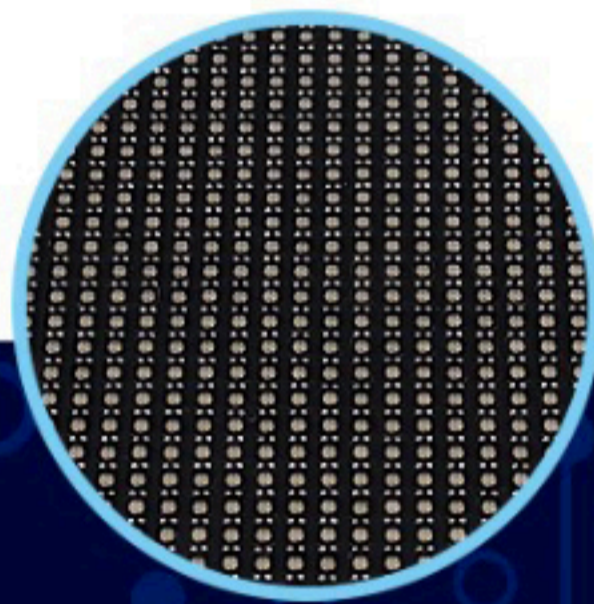

Good surface uniformity, high stability, uniform color distribution.



Suitable for performances, bars, conference rooms, exhibitions, etc.

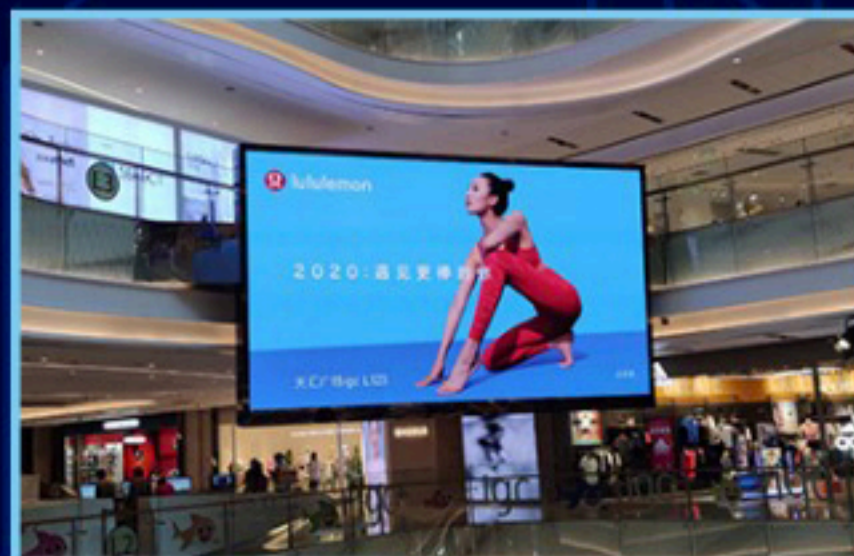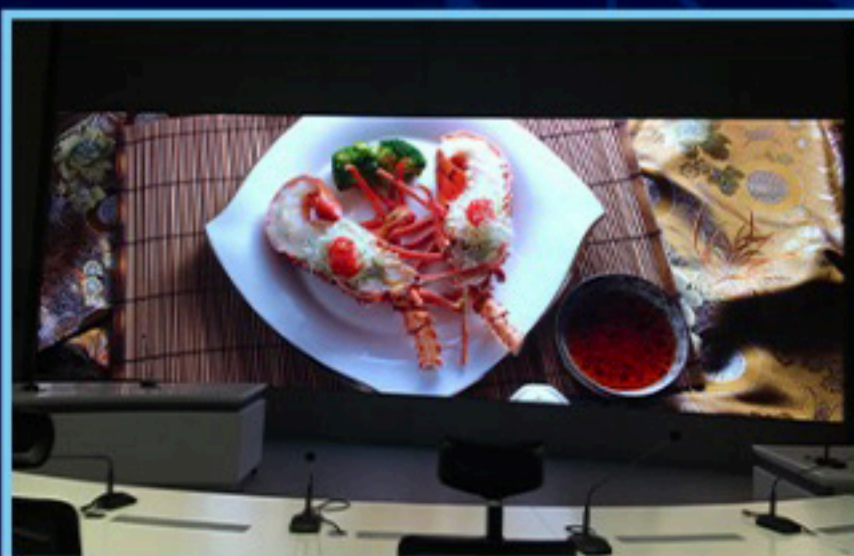

型号 Type Number	SP2.5-A	SP2.5-B
规格尺寸 Dimension (mm)	320 × 160MM	
像素点间距 Pixel Pitch (mm)	2.5MM	
LED规格 LED standard	SMD2020	
扫描模式 Scan Type	1/32Scam	
像素密度 Pixel density(dot/m ²)	160000 dot/m ²	
模组分辨率 Module resolution (dot)	128 × 64	
灰度等级 Grey level	16 bit	
刷新率 Refresh Frequency(Hz)	3840Hz	1920Hz
亮度 Brightness (CD/m ²)	≥ 500 CD/m ²	
最佳视距 Best viewing distance(m)	≥ 2.5MM	
模组最大功率 Module max.power	24W	
防护等级 Protection level	IP50	
可视角度 View angle	120 °	
工作温度 Working temperature	-20 ~ 60°C	
工作湿度 Working humidity	10% ~ 90%RH	
使用寿命 Life span	≥ 50000 Hours	
输入电压 Input voltage	DC 5V	