



**LED - P3.91
VIDEO FLOOR**

CH-IFP3.9MM

I L L U M I N A T E Y O U R W O R L D

LED-P3.91 VIDEO FLOOR

Two sizes 500x500x95/500x1000x95mm



RGB



CE



LAN control




Seamless stitching



Fast maintenance



Bearing capacity

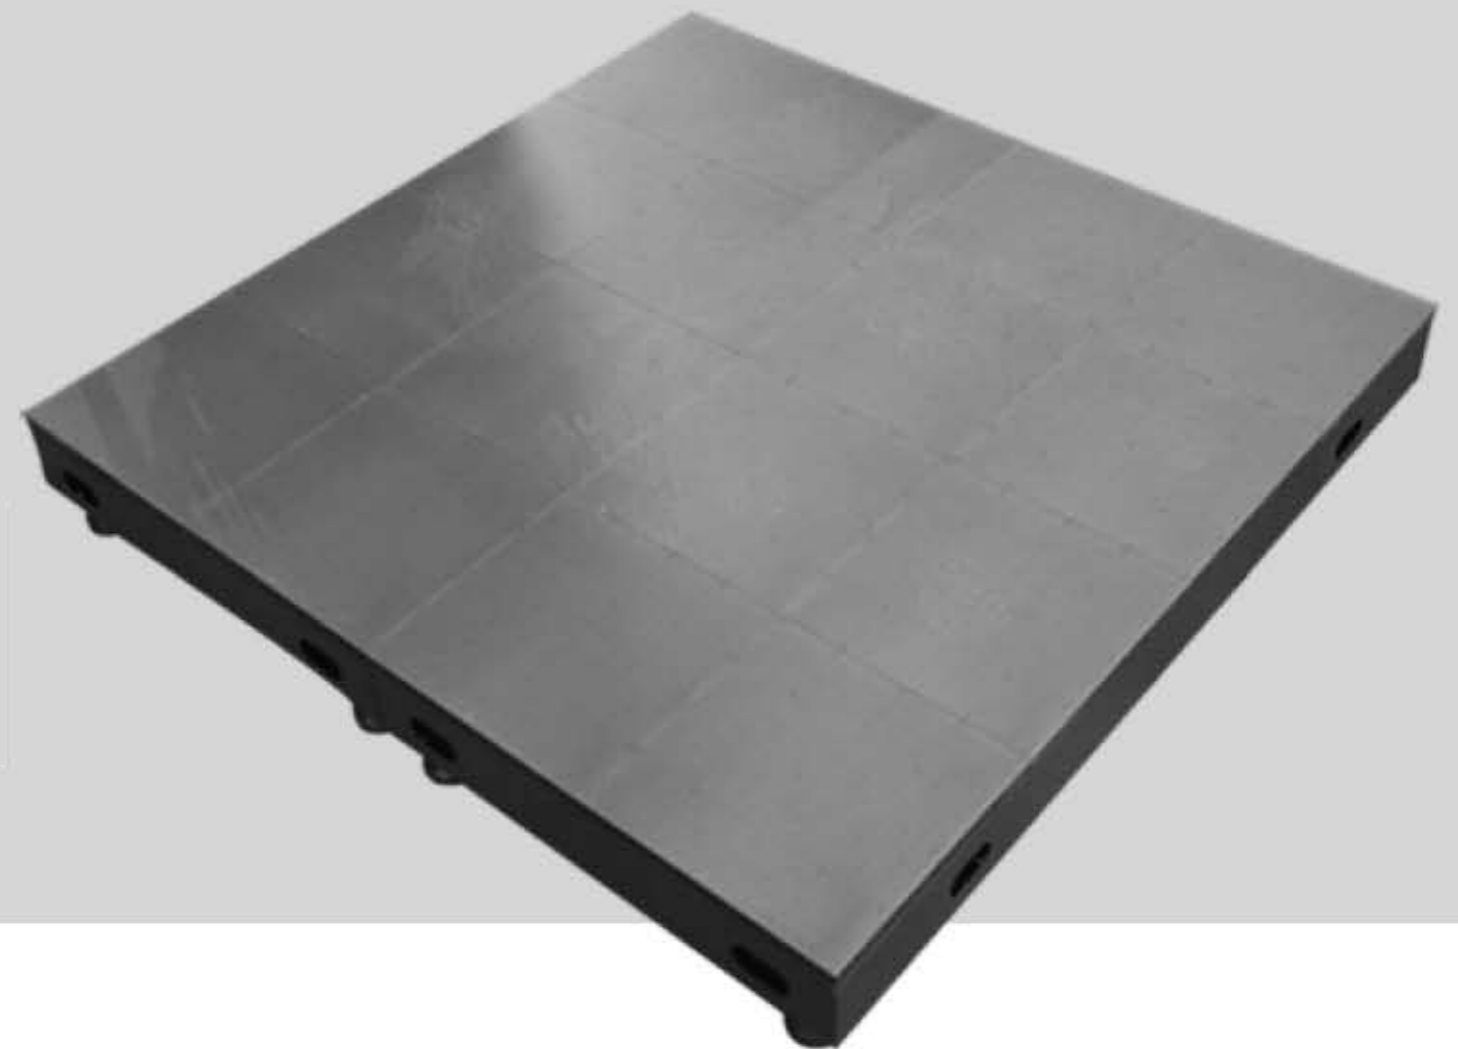



HD display

Pixel pitch 3.91mm




Waterproof design

Professional waterproof,
moisture-proof and
dust-proof performance,
waterproof grade reaches IP65.

Quick maintenance of the cabinet

Rechargeable suction cups
can replace the cabinet in 3 seconds,
improving maintenance efficiency.

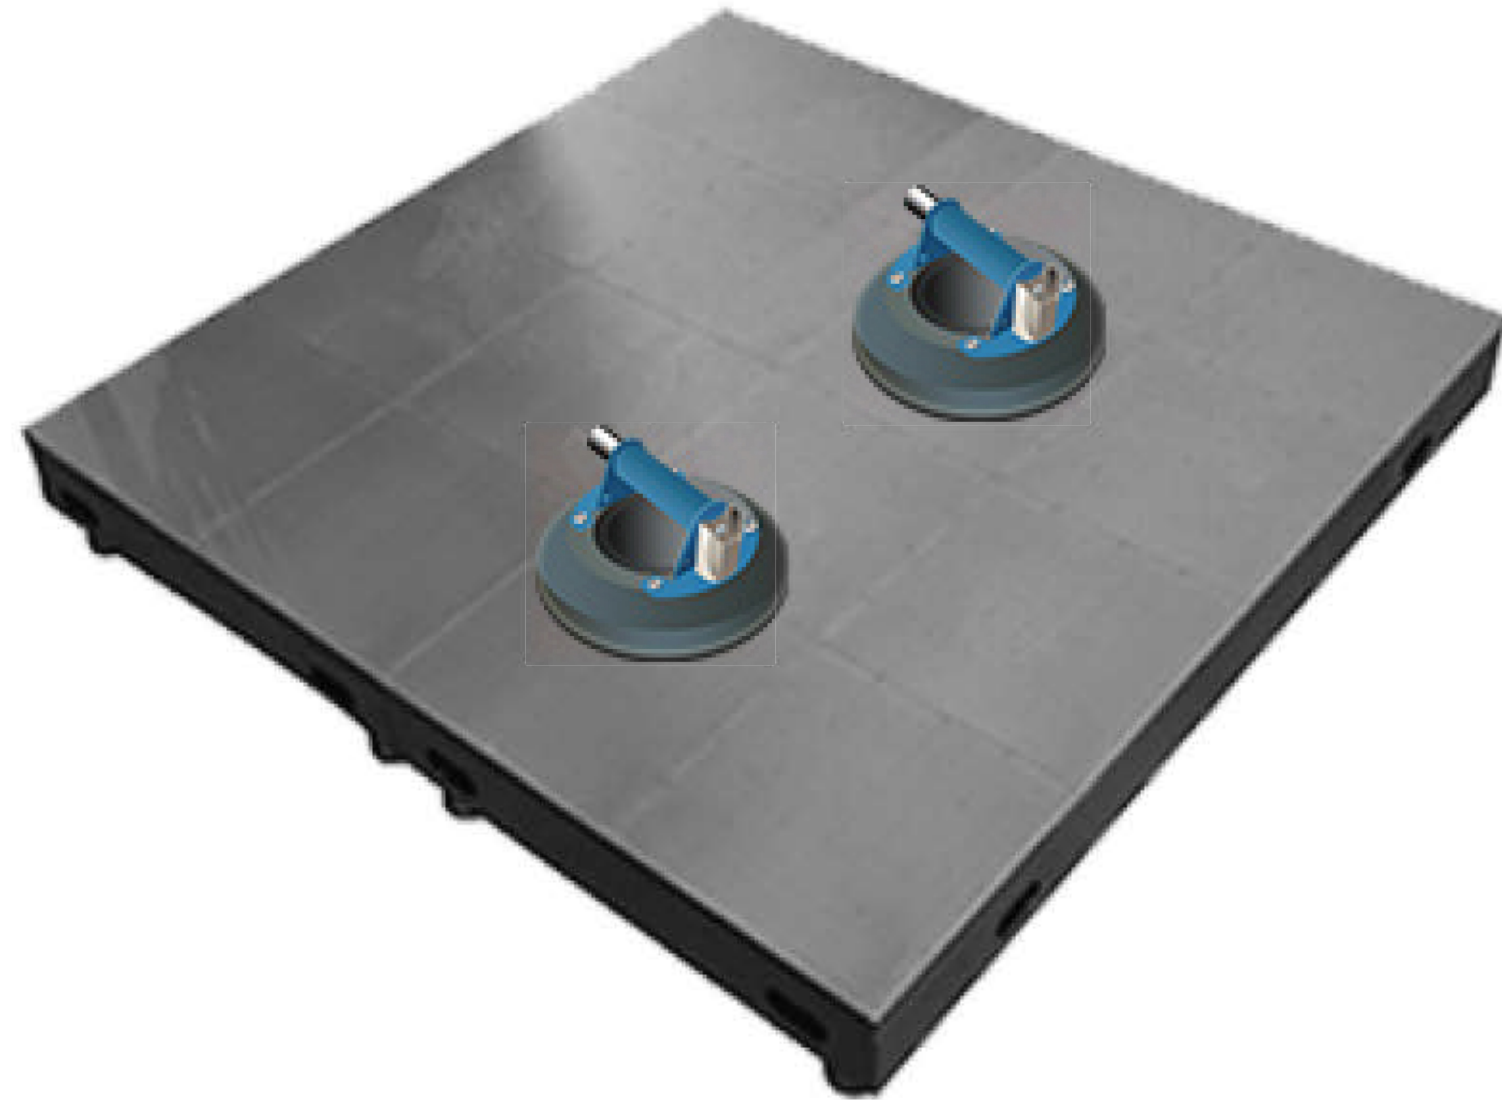



High-performance load-bearing Non-slip and wear-resistant

Strict pressure test,
can withstand 500kg/M²
Scratch and abrasion resistant,
non-slip, non-reflective,
Stepping on high heels has no effect.


Professional Mask design

The use of PC material,
professional anti-blunt,
anti-scratch mask design,
can make the floor tiles get
a long-term use guarantee.



Strong durability

Anti-uv characteristics,
even after many years of sunlight,
it can still maintain the original color,
viewing from different angles,
the color is uniform and no color difference.

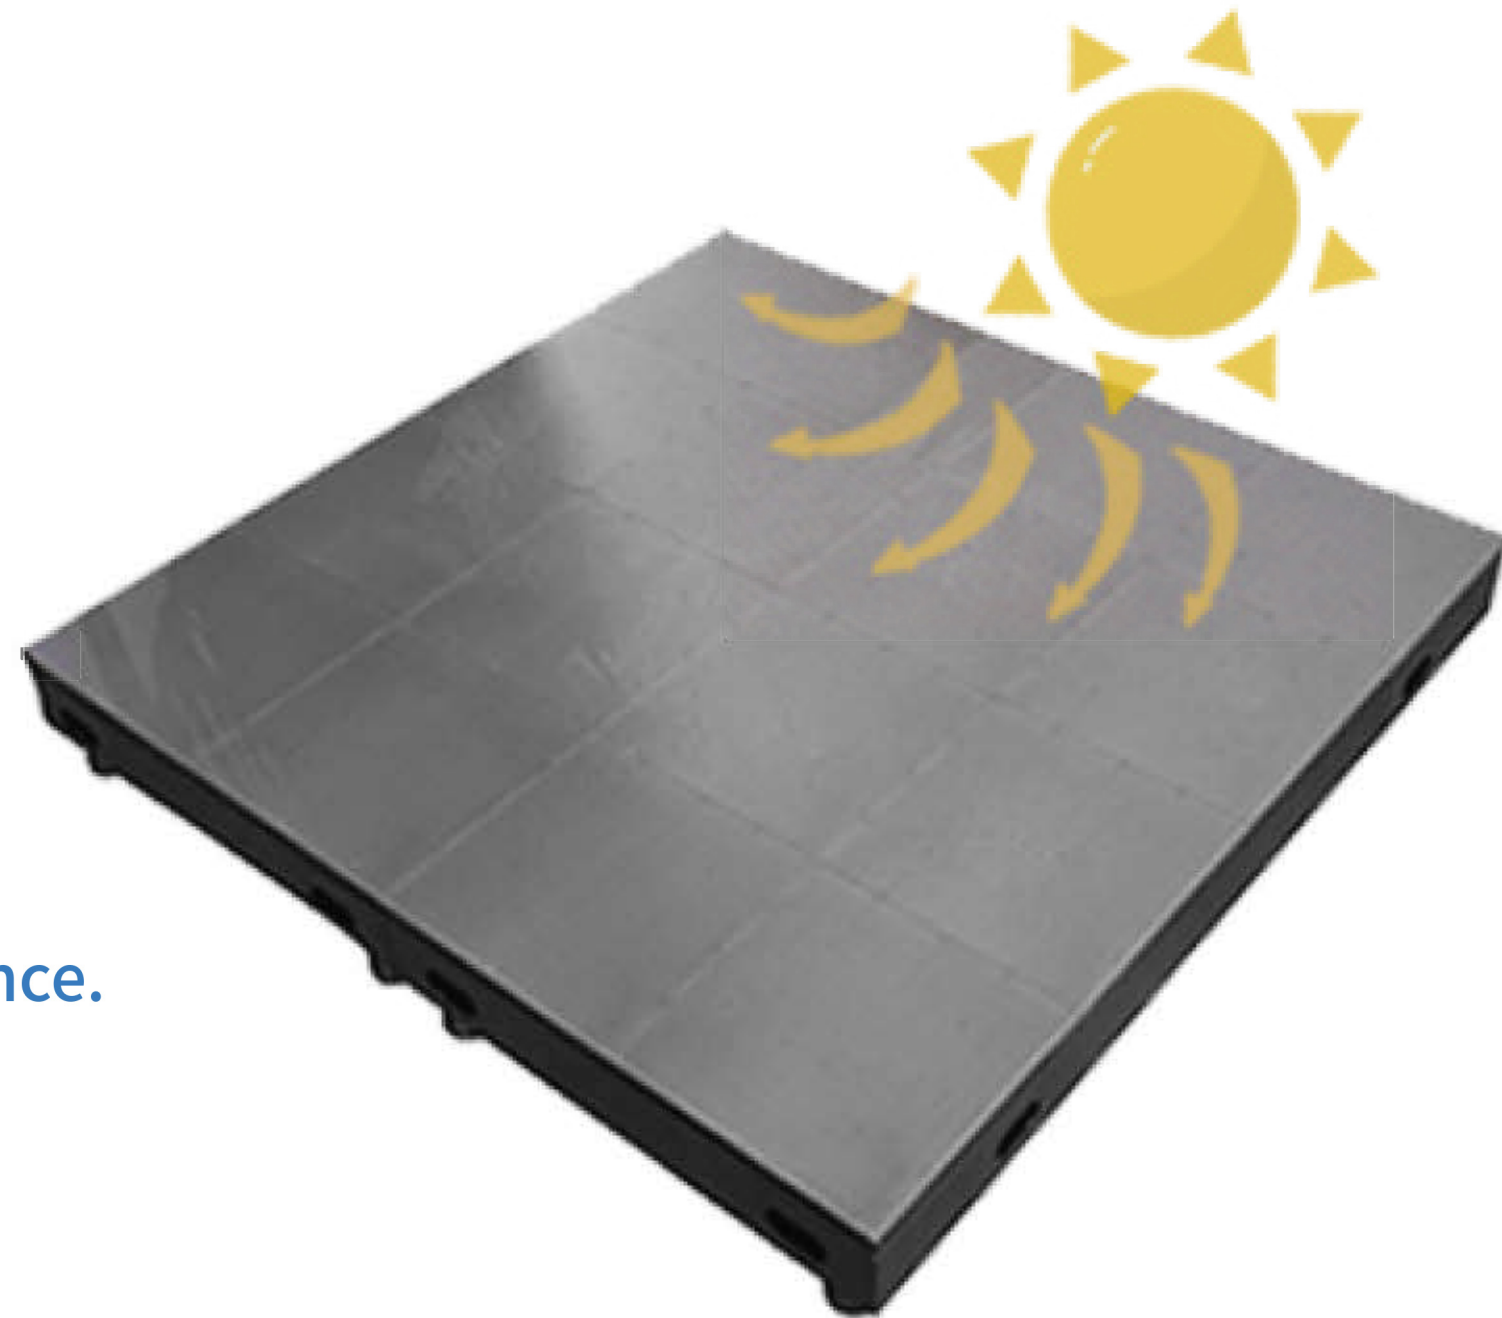

Installation and commissioning


The height of the corner code is adjustable from 130MM to 170MM,
The installation environment is adaptable to a wide range of applications.






Compact structure High brightness High refresh

The close-fitting airtight heat dissipation structure eliminates the moiré phenomenon, high brightness, clear and lifelike images, and diversified display modes.

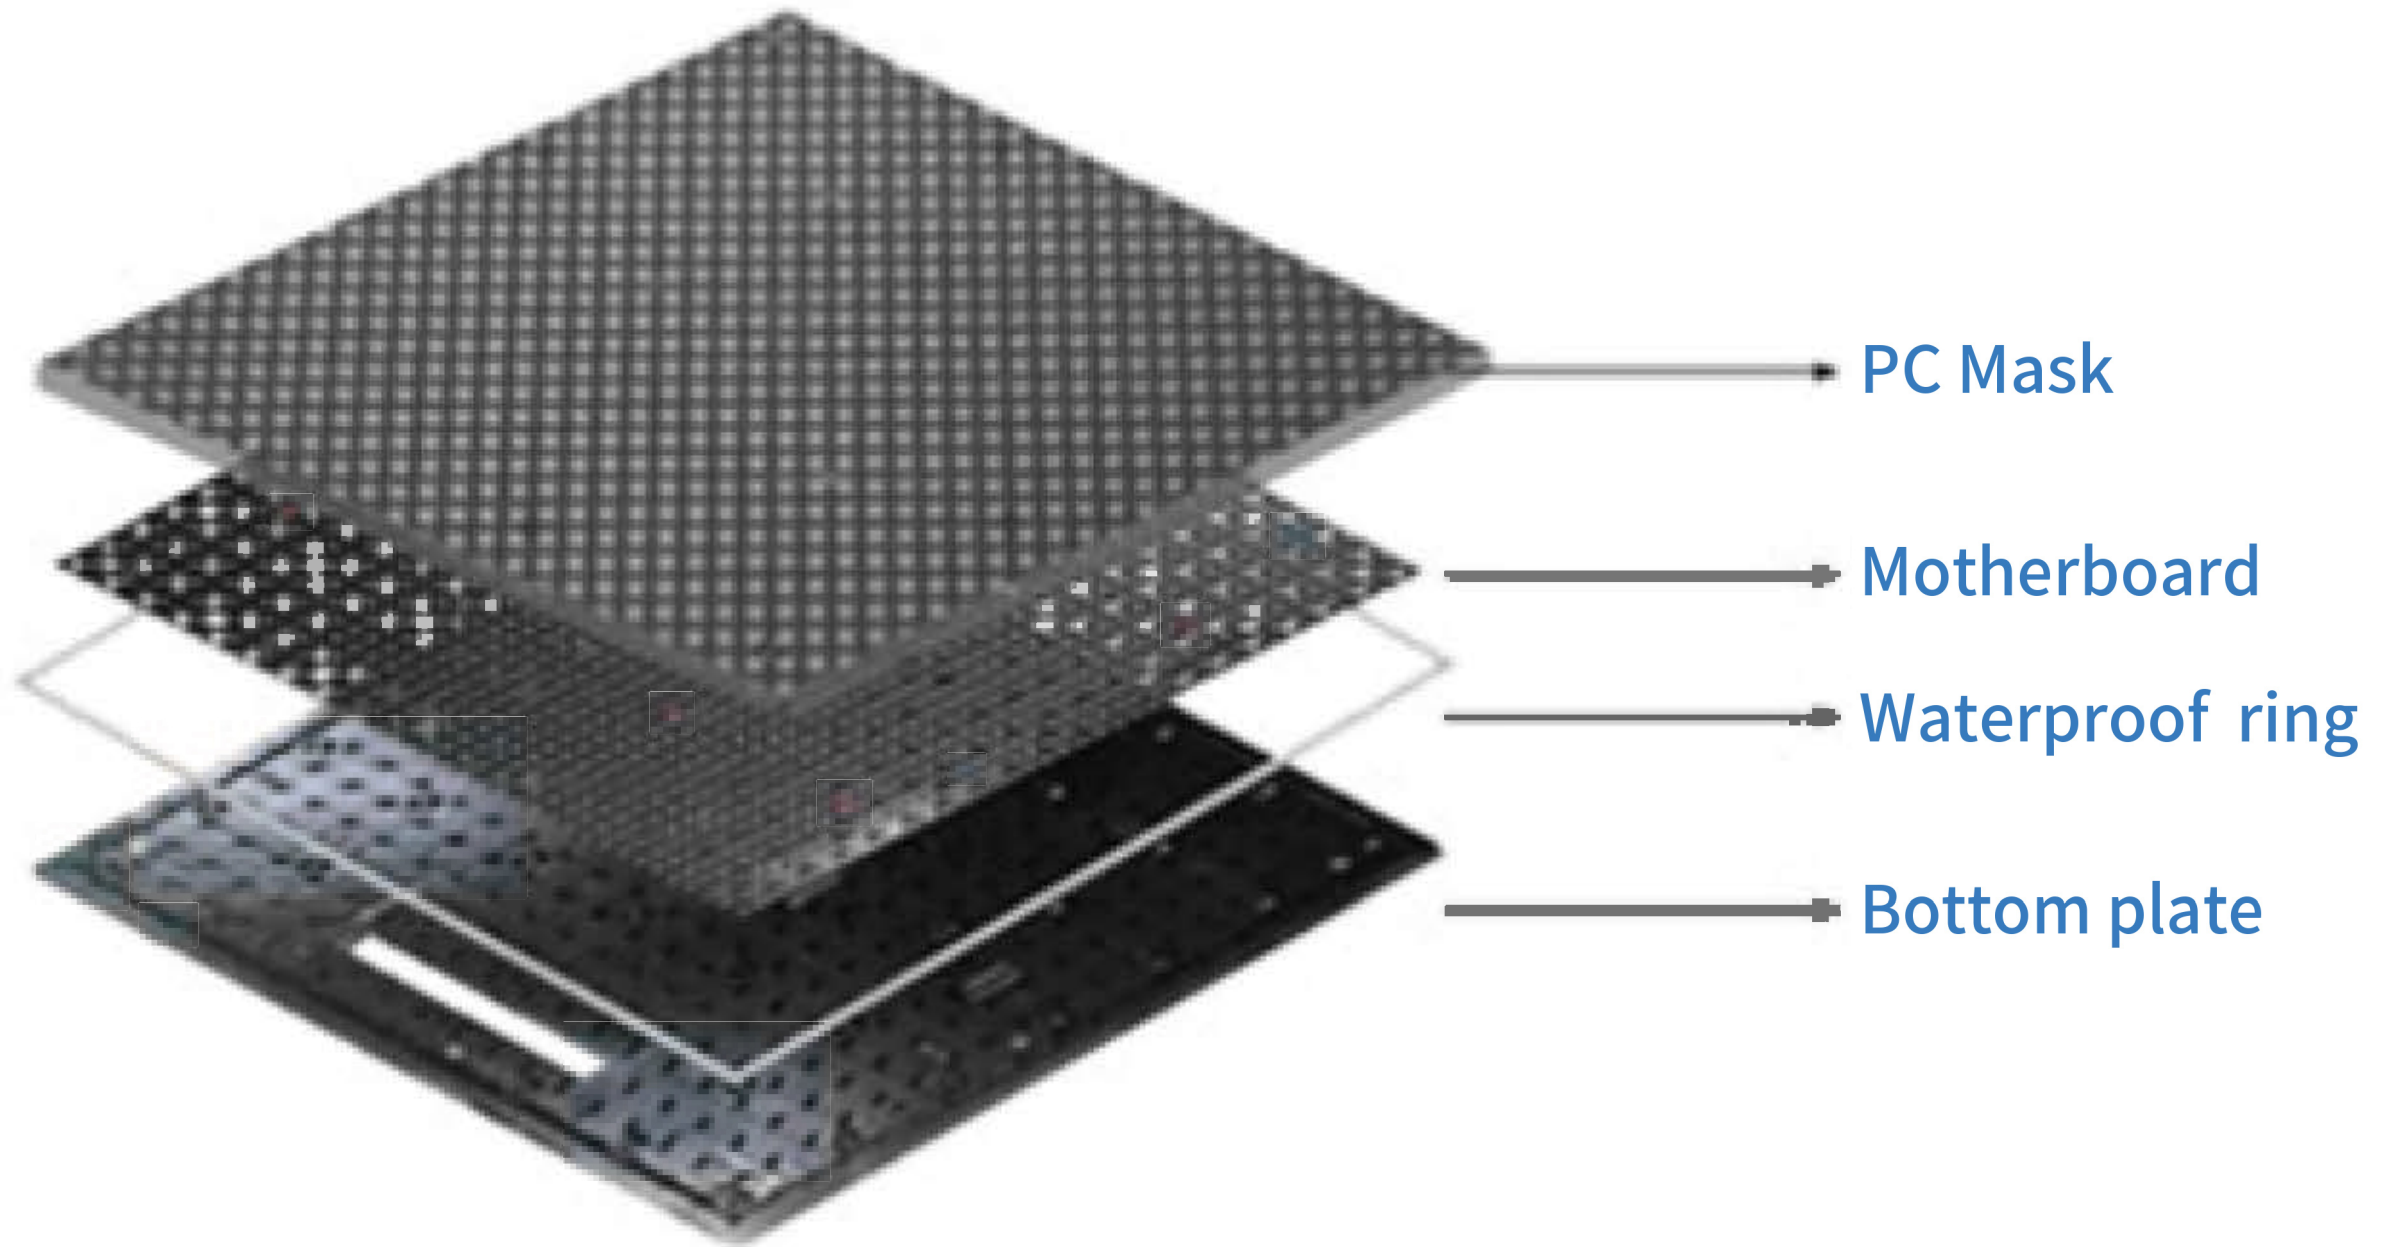

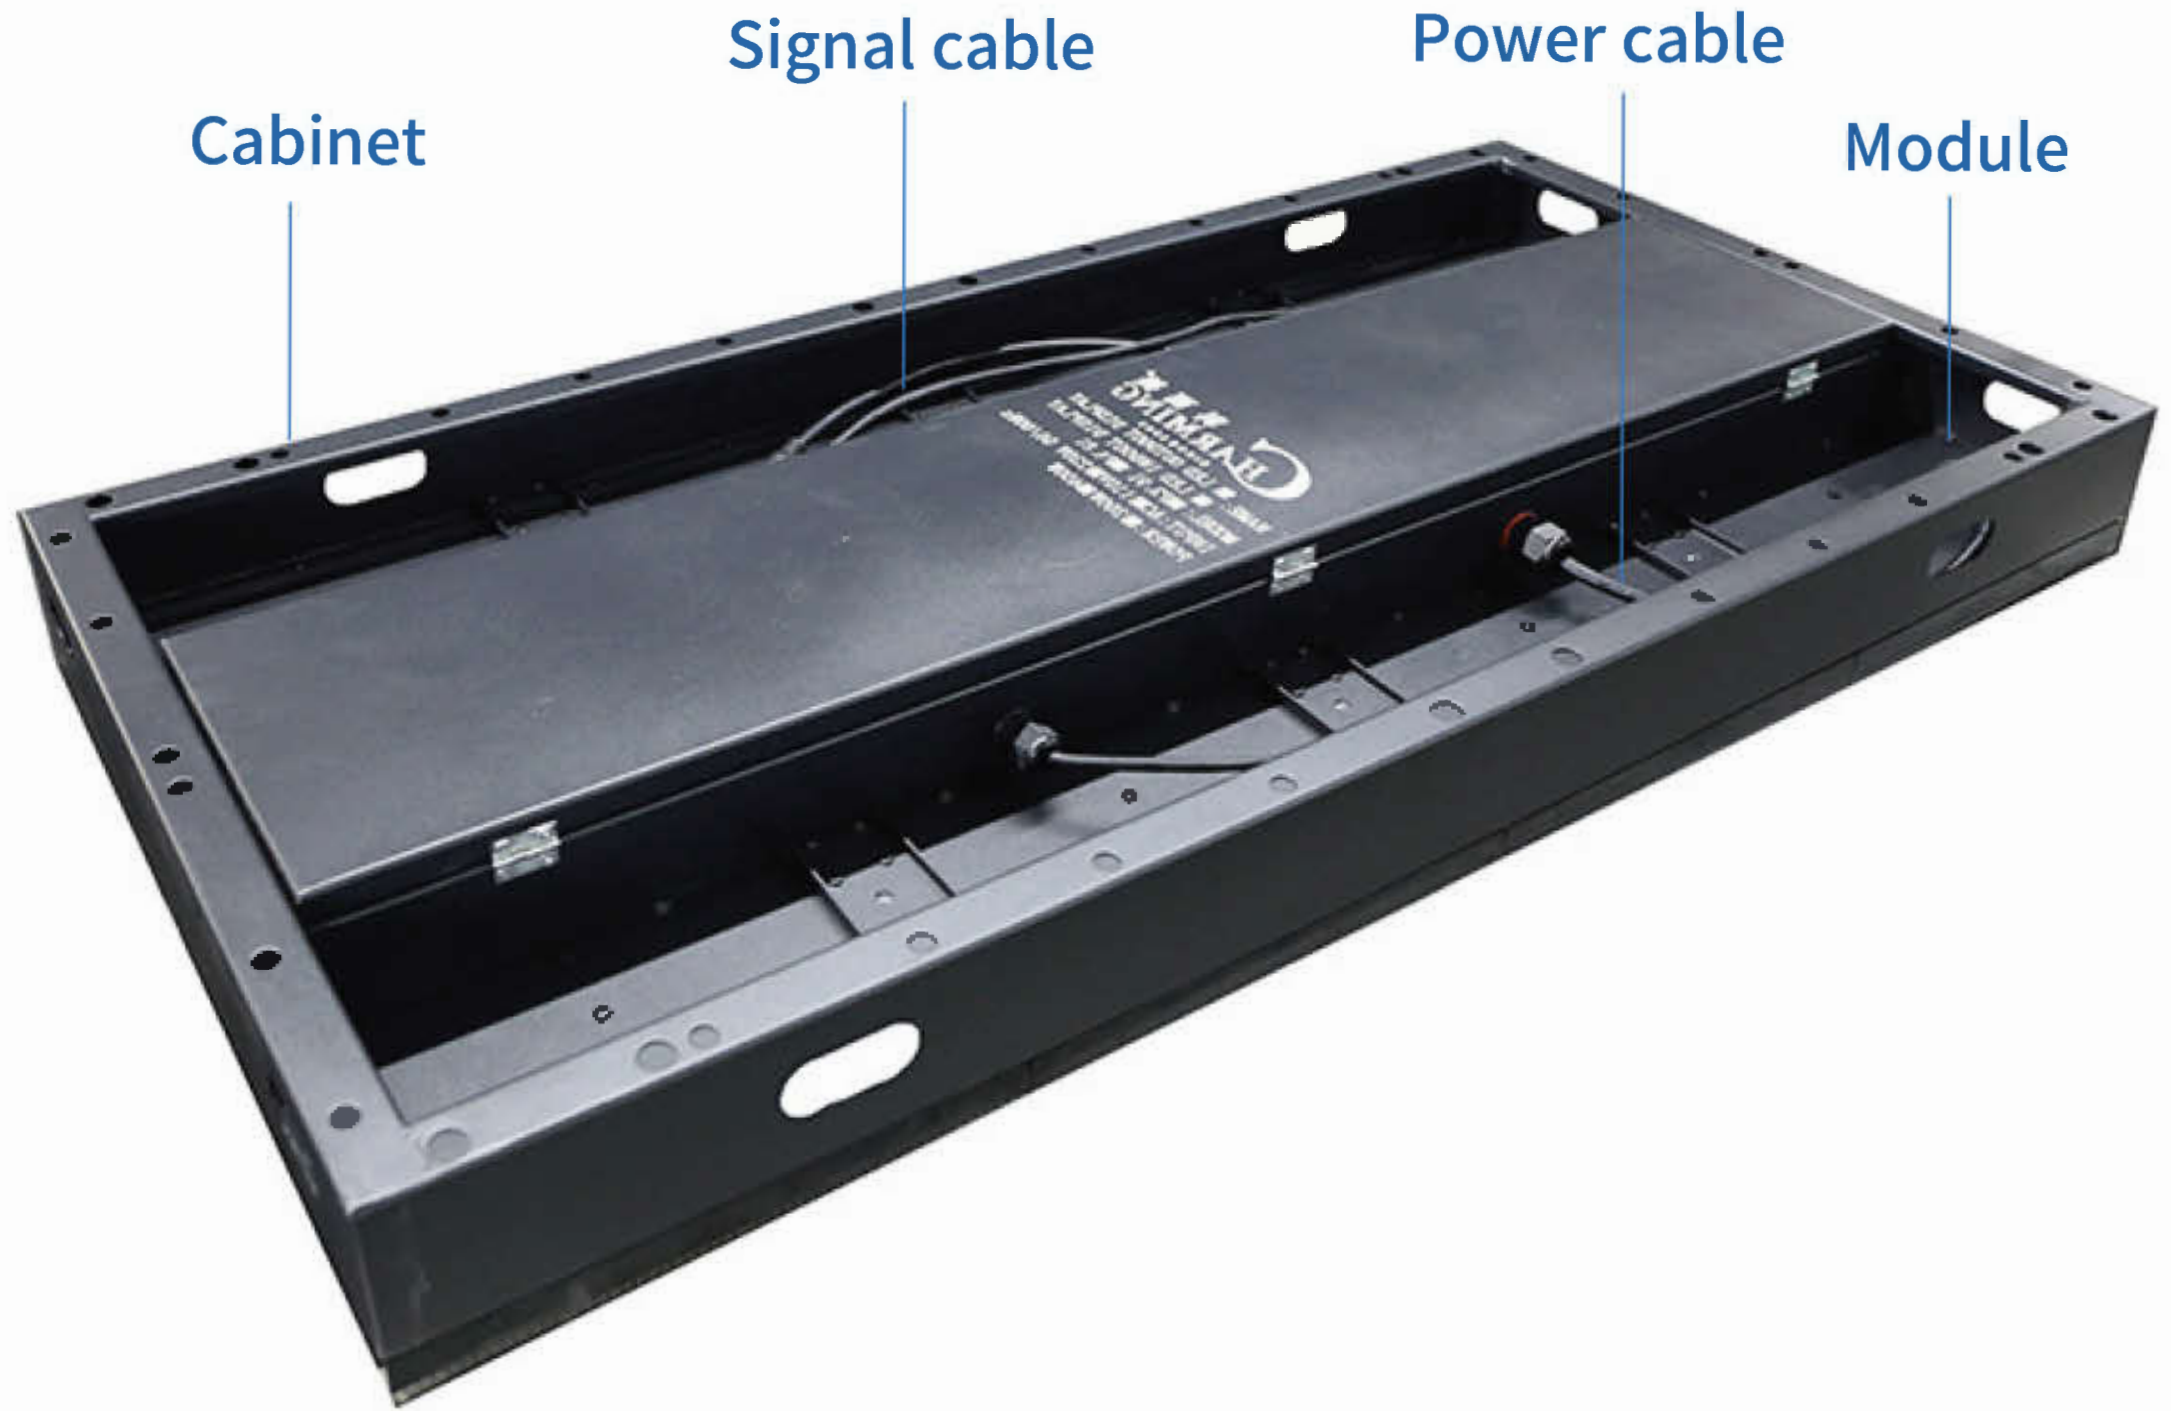

Cabinet



Signal cable

Power cable

Module



unit:mm

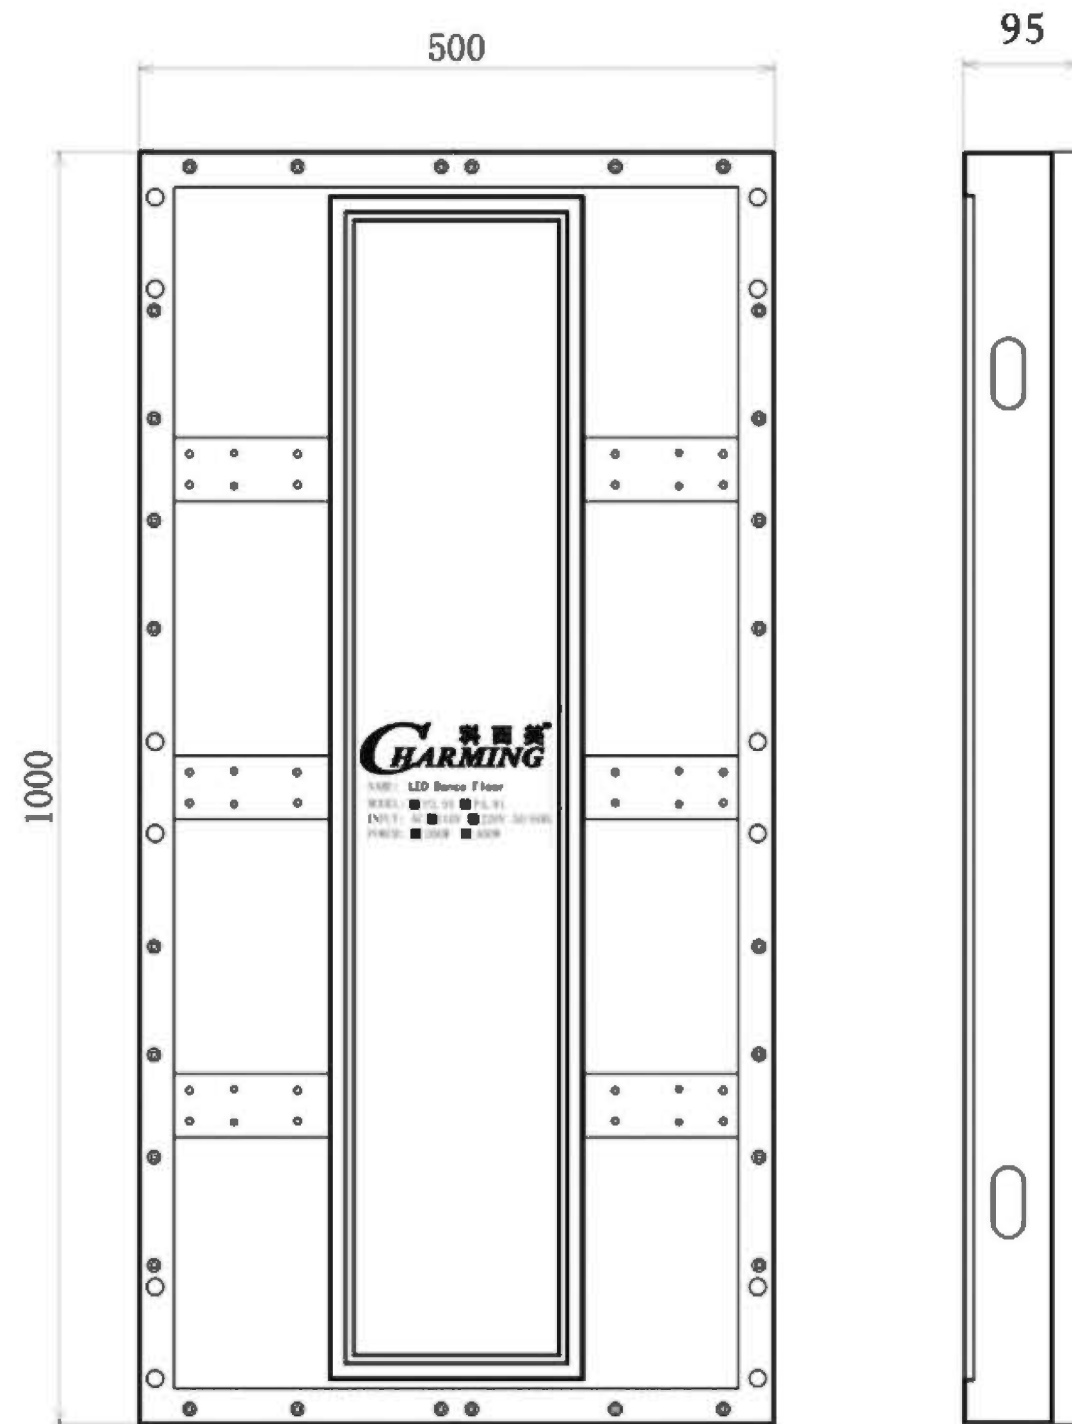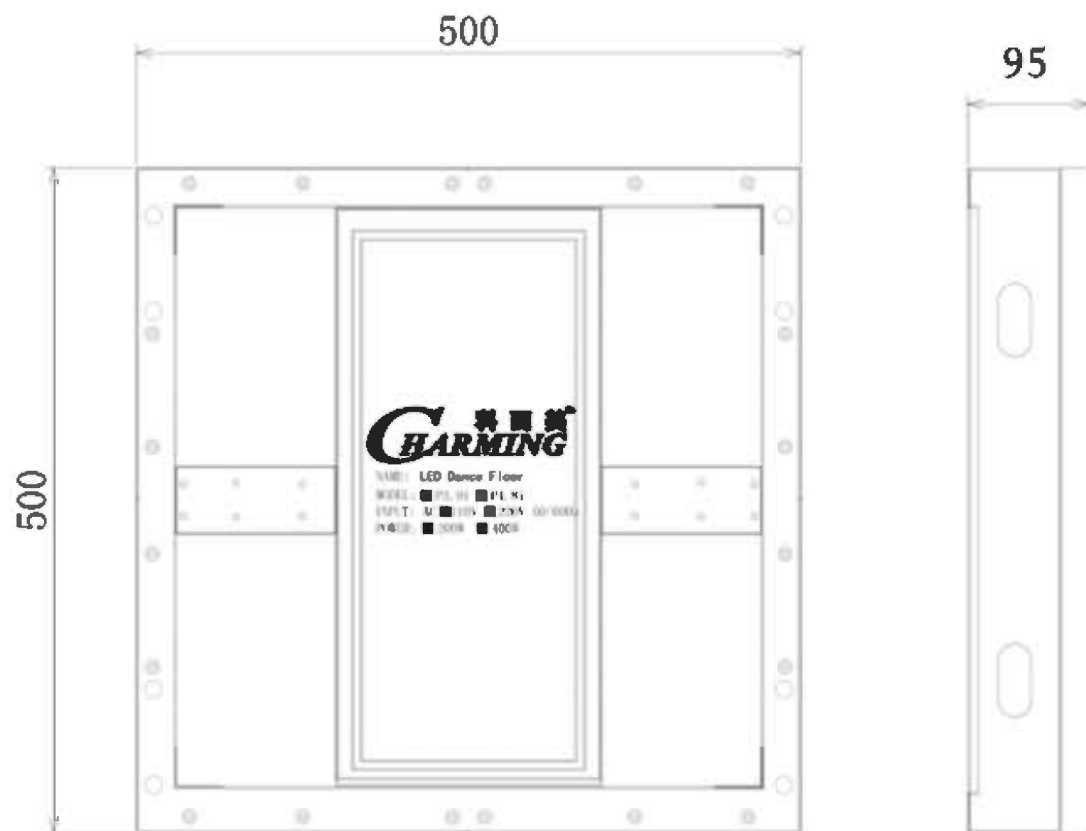

ILLUMINATE YOUR WORLD

型号Type Number	T391-500-A3	T391-1000-A3
箱体尺寸 Canbinet Size (mm)	500X500X95mm	500X1000X95mm
像素间距 Pixel Pitch (mm)		3.91mm
像素密度 pixel density (Dot/m ²)		65536 Dot/m ²
LED规格 LED Size		SMD1921
扫描方式 Scan Type		1/16 Scan
灰度等级 Grey Scale		12-16bits
刷新频率 Refresh Frequency (Hz)		1920/3840Hz
整屏亮度 Screen Brightness (CD/m ²)		≥4500DC/m ²
最佳视距 Best Viewing Distance		≥4M
最佳尺寸 Module Size (mm)		250X250mm
模组分辨率Module Resolution		64X64
模组最大功耗 Module Max Power		40W
箱体最大功耗 Cabinet Max. Power (W)	200w	400w
屏体分辨率 Screen Resolution	128X128	128X256
箱体重量 Cabinet Weight (Kg)	13kg	25.5kg
IP等级 IP Grade		IP65
屏体工作温度 Screen Working Temperature		-30~60°C
相对湿度 relative humidity		10%~95%Rh
使用寿命 Life Span		≥100,000 Hours

TEAM SPIRIT



CERTIFICATE



More than 20,000 successful projects / 130 patents

OFFICIAL PARTNERS

<p>CHINA BEST POWER SUPPLY SUPPLIER</p>	 <p>国星光电 NATIONSTAR</p>	<p>CHINA TOP 1 LED SYSTEM SUPPLIER</p>	 <p>MADRIX[®] MUSIC MAKES THE LIGHT</p>	<p>CHINA TOP 1 LED IC SUPPLIER</p>
 <p>MW MEAN WELL</p>	<p>CHINA BEST LED LAMP SUPPLIER</p>	 <p>NOVA STAR</p>	<p>GERMANY ORIGINAL MUSIC TO LIGHT SOFTWARE</p>	 <p>CHIPONE 集创北方</p>

CARGO SHIPPING

Frequent destinations cover over 150 countries/regions. More than 20,000 customers from North and South American, Europe, Middle East, East-South Asia, Africa, Australia, etc.




Bddfqu!ejggfsfou!tijqqjoh!ufsnt-!tvdi!bt!FYX-!GPC-DGS-DJG-!EEV! boe!EEQ-!qm fouz!pg!tijqqjoh!sftpvsdft!bsf!
bwbjmbcmf!up!nblf!zpv!sftu!.bttvsfe!pg!tijqqjoh/

PRODUCTION PROCESS DIAGRAM




SCREEN LINE CONNECTION DIAGRAM

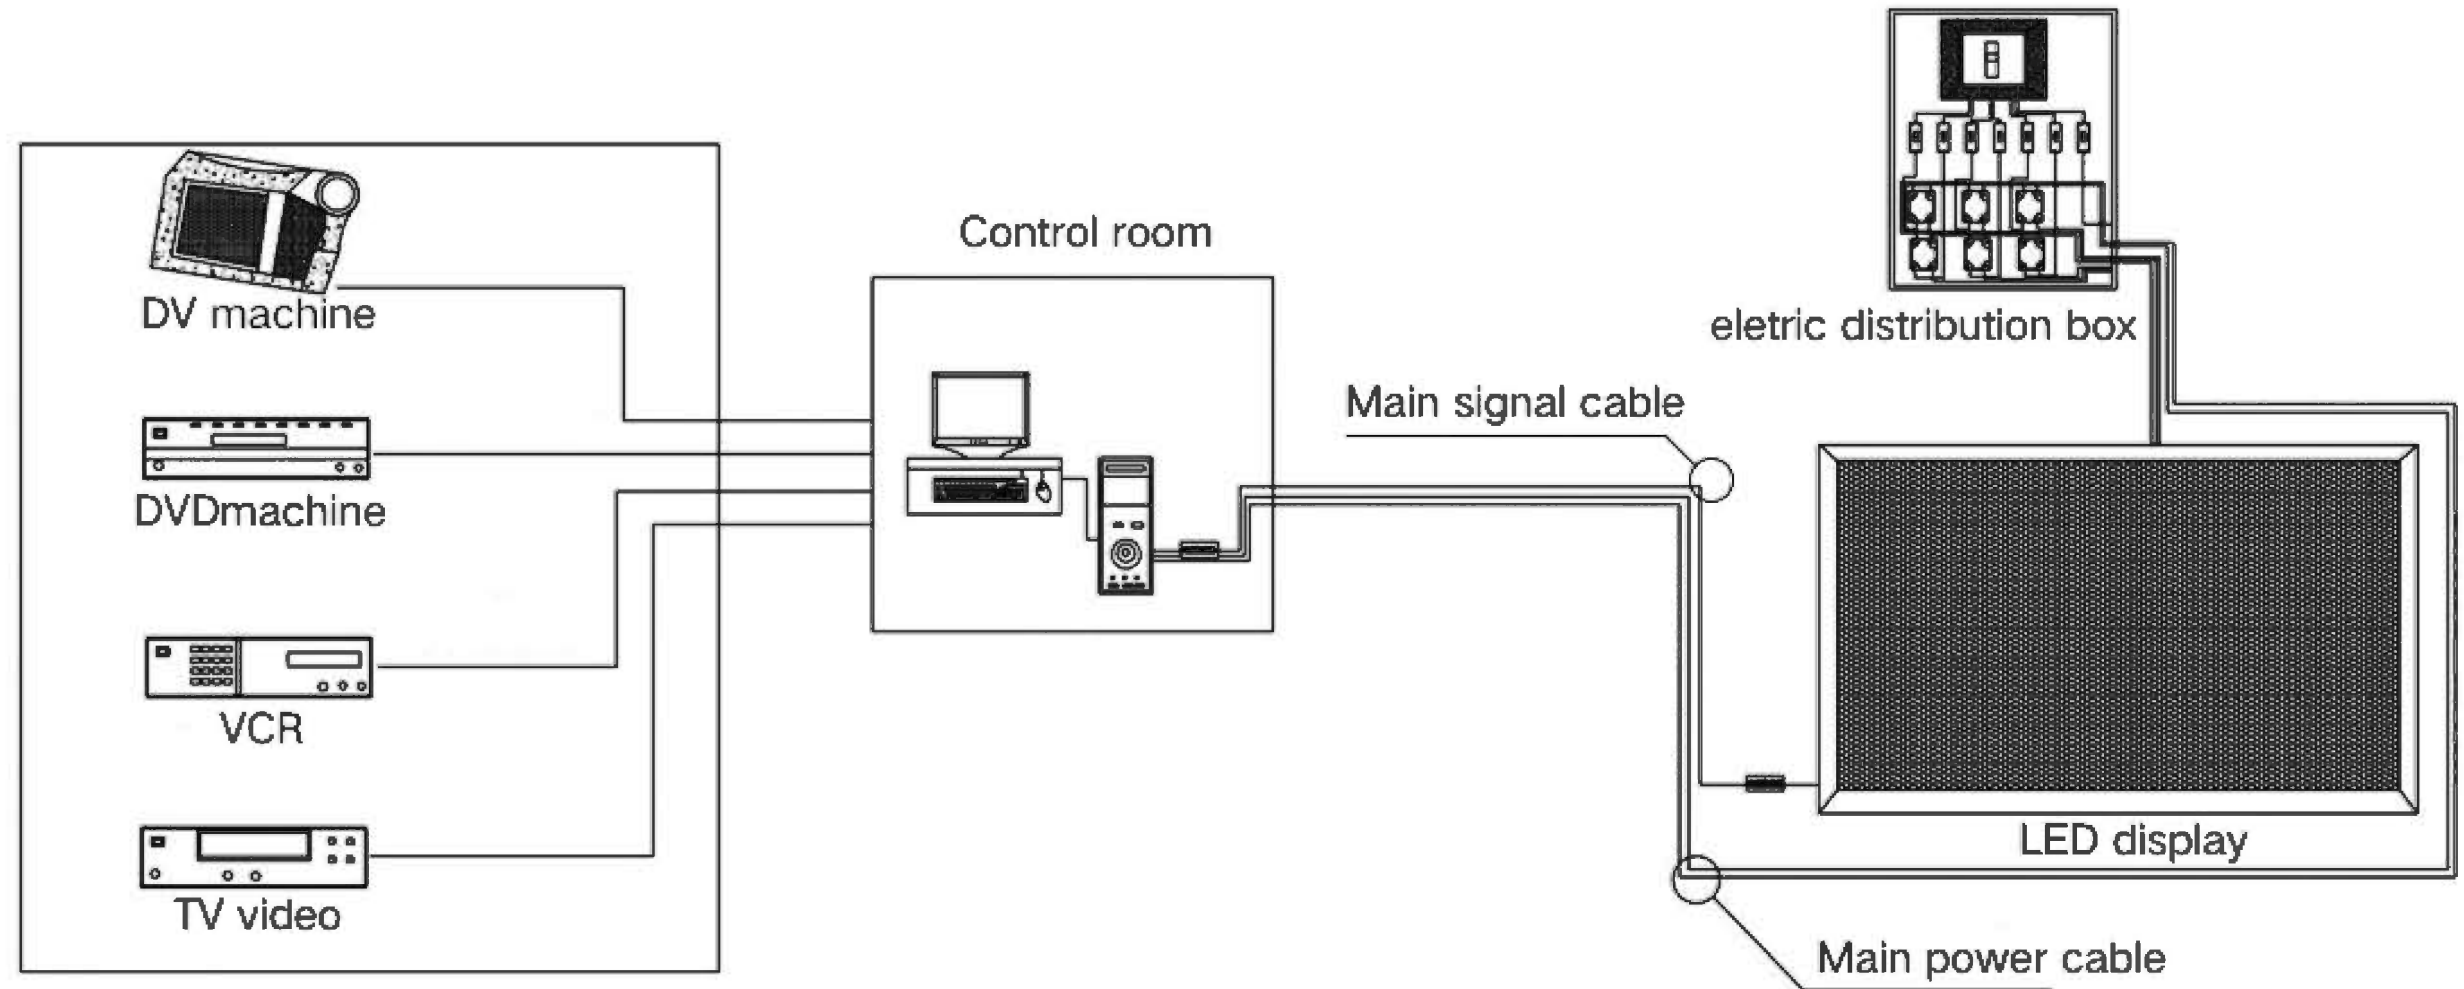

PRODUCTION PROCESS DIAGRAM

生产工艺示意图

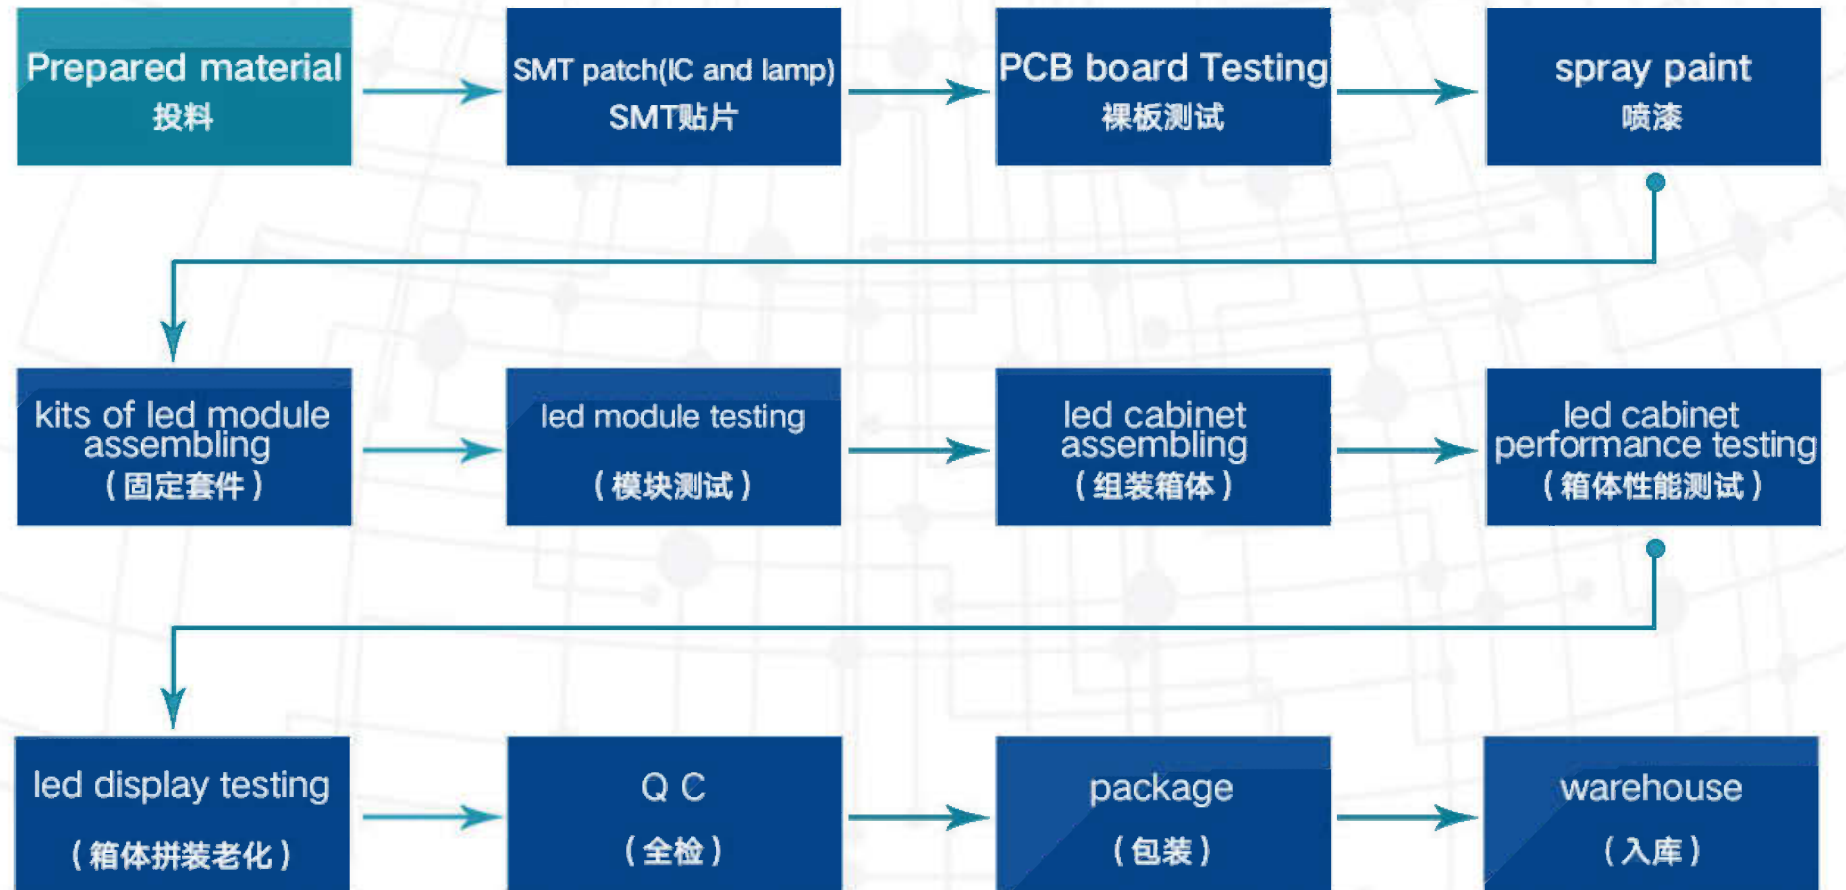

EXHIBITION SHOW

GET SHOW, PROLIGHT+SOUND, ISE, INFOCOMM, LDI



THE COMPANY SHOWS



集团总部
Headquarters building



广东科而美光电有限公司
Charming Co., Ltd



广州创美电子有限公司
Guangzhou Charming
Lighting Co.,Ltd



美国公司
C&E Tech Usa Inc



MADRIX · 中国
Madrix China

THREE DIFFERENT PACKAGE



Standard Carton Case



Standard Wooden Case



Standard Flight Case